




Intelligent Battery Management System

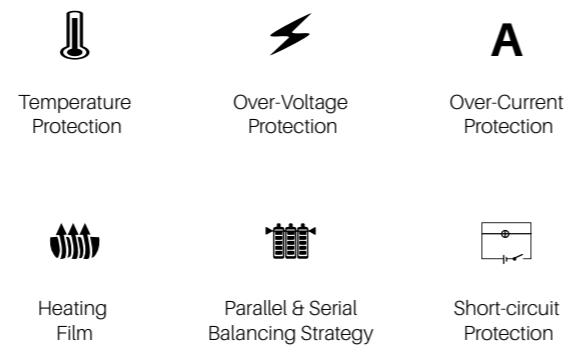

KEY FEATURES

Ultra-Safety

The battery management system (BMS) provides comprehensive protection to the battery and manages the charging/discharging process wisely.

Auto-Balance

Connects multiple batteries in parallel safely without internal state non-uniformity issues.

Uncompromising Quality

State-of-the-art battery cells ensure a lifespan of more than 6000 cycles, 100A continuous discharge current, and a wide range of operation temperature.

Communication

CAN, RS485, Blue Tooth, Dry Contact enable data transmission to meet the needs of different usage scenarios.

12V Series

All Purpose Lithium Ion Batteries



SPECIFICATION

Model	RT12100G31
Electrical	
Nominal Voltage(V)	12.8
Nominal Capacity(Ah)	100
Working Voltage Range(VDC)	10.8~14.4
Internal Resistance(mΩ)	< 20
Charge Voltage(VDC)	14V-14.4
Nominal Operation Current(A)	50
Max. continuous operation current(A)	100
Peak Current(A)	200@30sec
Serial Connection	≤ 4 pcs
Parallel Connection	≤ 4 pcs
Structure	
Dimension (mm)	325*173.5*226
Weight(Kg)	13±0.2
IP rating	IP67
Power Terminal	M8 bolt
Working Environment	
Charge working temperature (°C)	0~60
Discharge working temperature (°C)	-20~60
Working temperature (°C)	-40~60*
Altitude (M)	< 4,000
Humidity(RH)	5~95% (w/o condensing)
Communication	
RS485	115200bps
CAN	500Kbps
Bluetooth	BLE5.0
Dry contactor	2×inputs & 2×outputs
Certification	
SAE J930, SAE J1455, UL1973, IEC62619,FCC,CE, Bluetooth SIG, UN38.3	

*During -40°C ~ -20°C, only heater will be enabled for heating up the module, battery cannot charge/discharge during such period.

